

## GD – SUBMERSIBLE SEWAGE PUMP

App Pumps present the GD grinder pump. Made from rock solid cast iron and stainless steel, these pumps are built to last. The manufacturer provides a two-year guarantee with the GD pump.


The GD grinder pump is normally used in sewage stations to service houses, either in groups or individually whereby normal gravity-driven drainage isn't possible. If effluent is needed to be pumped via a small-bore pipe, across a good distance then this is the perfect pump. Soft solids, shreddable fibres and sewage are easily pulverised with the chrome steel cutting mechanism. The GD grinder pump is also well suited to agricultural disposal systems that feed into sprinklers.

There are several different models in the GD pump series, the GD-15 and the GD-20 are both available as either a mountable option on a rail guide, or freestanding. An auto-coupling kit would need to be purchased alongside the pump for the first option. The GDH-15 model is only available to buy as a freestanding unit.

All the GD pumps come with 10m of robust, heavy duty power cable.



GD-20

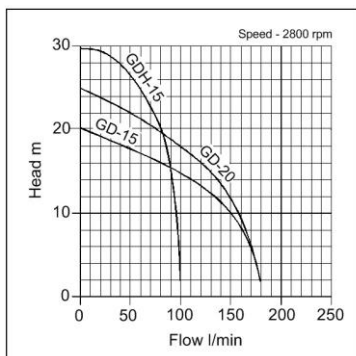

### Suitable for:

- Sewage
- Industry
- Agriculture
- Residential
- Pumping stations
- Fixed Installations
- Sprinkling

Model	Manual / Auto	Outlet (mm)	kW	Volt	Flow (l/min)	Head (Mtrs)	W x l x h (mm)	Dry Weight	Packing Weight
GDH-15	M	1 ¼ "	1.1	230/400	100	30	240x170x510	25.75	29.35
GDH-15A	A	1 ¼ "	1.1	230	100	30	240x170x510	26.45	29.85
GD-15	A	1 ¼ "	1.1	230	180	20	240x185x490	28.35	34.60
GD-20	M	1 ¼ "	1.5	230/400	180	25	240x185x510	30.25	36.50
GD-20A	A	1 ¼ "	1.5	230	180	25	240x185x520	30.70	36.95

Optional extra: auto coupling set for guide rails, (GD-15 and GD-20 only)